


# Trim Acoustics

## Acoustic Floating Floor System

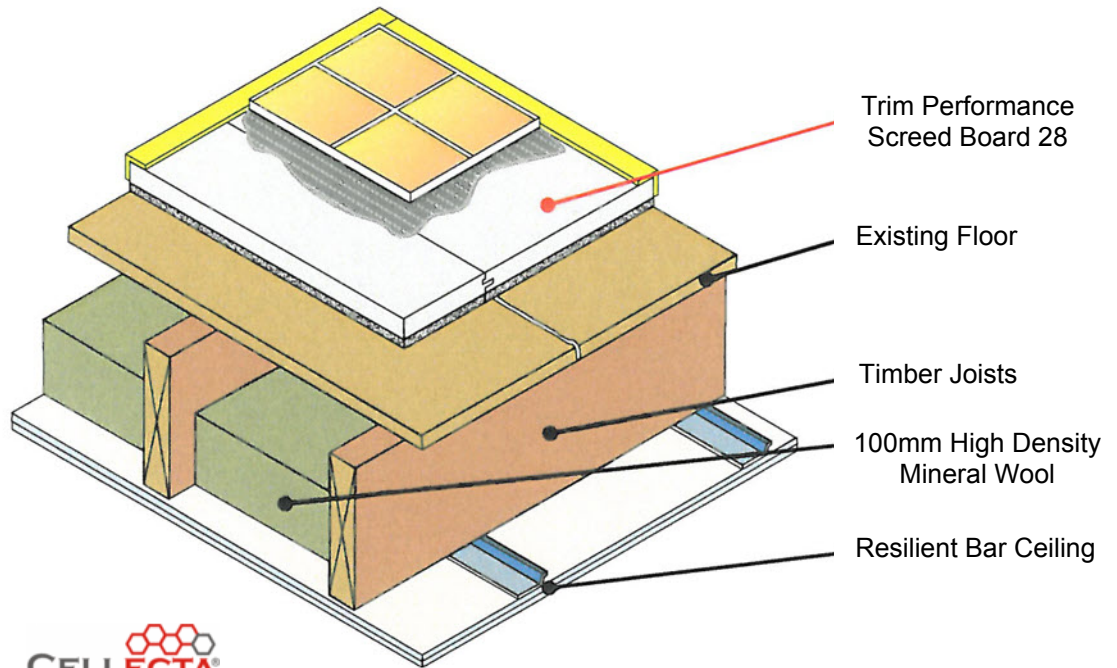

### CELLECTA ScreedBoard 28

High performance acoustic floor ideal for areas that require ceramic tile finishes

This 28mm thick acoustic floating floor system with a unique 'click' style joint is the only acoustic floor that ceramic tiles can be bonded directly to, so keeping the floor build-up to a minimum.

Cement based board bonded to a resilient layer of acoustic foam on the underside.

#### Dimensions & Weight

	Thickness	Dimensions	Weight
Cellecta Screed Board	28mm	1200mm x 600mm	27kg/m <sup>2</sup>

#### Acoustic Performance

	System Composition	Airborne Rw +Ctr	Impact Ln,w
Cellecta Screed Board	With Resilient Bar Ceiling	54dB	54dB

Overlaid onto existing floor boards or 18mm T&G ply or chipboard flooring with 100mm High Density Mineral Fibre between 50mm x 235mm timber joists at 450mm centres with 2 x 15mm plasterboard fixed on resilient bars.